Relay Module

S318N, S318N-24

Transistor driven DPCO Interface 8amp relay modules. The device accepts a variety of input conditions (Voltage, Logic, Closed Circuit and Open Circuit) for interfacing various signals via voltage free DPCO contacts.

Specification	S318N, S318N-24
Led Current	N/A
Switch Contacts	DPCO contacts rated at 8A
Visual Indication	1 x Red
Integral Sounder Level	N/A
Supply Voltage	12vdc or 24vdc depending on version
Supply Input Current	60 mA max
Tamper	N/A
Material	PCB Module with self-adhesive backing
Dimensions	52 x 47 x 18 mm
Weight	0.034kg
IP Rating	N/A
Approvals	UKCA and CE marked, ROHS compliant

Benefits and Features

- Self adhesive backed for easy mounting
- Four holes also provided for permanent fixing
- Transistor driven interface relay
- Screw terminals for easy connection
- Manufactured in the UK

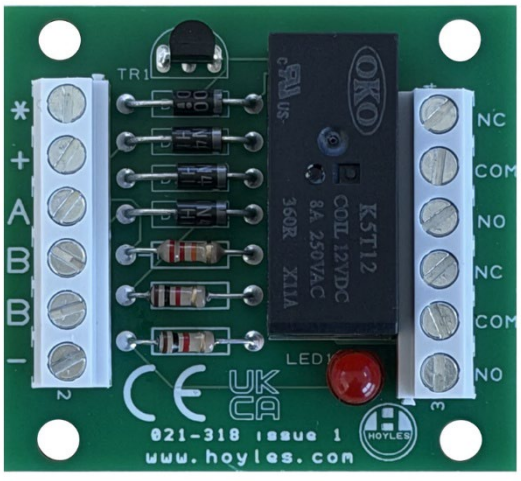

Hoyles Electronic Developments Ltd
Sandwash Close, Rainford, St Helens, WA11 8LY, UK
www.hoyles.com
sales@hoyles.com
+ 44 (0) 1744 886600