

Waterproof Reset Call Point

The Waterproof ReSet Call Points are a unique call point that mimic the feel of breaking glass whilst offering the user the benefits and environmental advantages of a re-settable operating element. They are specially designed for use within harsh environments such as oil rigs, ships, factories, as well as wash down areas that are sensitive to broken glass. They are compatible with most conventional fire alarm systems. They are safe to use in areas where glass cannot be used such as food processing plants and leisure centres. As the units can be simply reset they provide an ideal solution for areas that suffer from a high number of false activations such as schools, shopping centres and other public places.

How it Works

The 'ReSet' uses a simple yet ingenious patented mechanism which consists of a rigid plastic operating element and an over centre spring mechanism. This arrangement provides real action on operation and simulates break glass activation. An activation indicator drops into view at the top of the window after the 'ReSet' has been operated. The unit is then simply reset with a key and is ready for reuse straight away.



Step 1
Positive action - mimics the feel of breaking glass.



Step 2
A warning indicator drops into view when the call point is activated.



Step 3
To reset a simple key is inserted into the bottom of the call point.



Step 4
A quick turn of the key and the call point is reset and ready for use again straight away.



General Information

- Unique manual call point that mimics the feel of breaking glass whilst offering the user the benefits and environmental advantages of a resettable operating element.
- Three year guarantee against breakage of polycarbonate in normal use (one year guarantee on electromechanical and electronic components).

Design

- An indicator drops into view at the top of the window on activation. The unit is then simply reset with a key and is ready for re-use straight away.
- Waterproof models are tested to IP67.

Construction

- Extremely attractive, high value look and feel: glass appearance maintains operator deterrence, whilst a visible warning flag confirms activation.

Installation

- Easy installation due to no glass elements that could be broken or incorrectly fitted.
- Surface mounted, 20mm conduit entry points are provided for ease of installation.
- Operating temperature -20°C (-4°F) to 65°C (149°F).

Options

- Low profile, heavy-duty terminations.
- Optional integral cover can be fitted to prevent accidental activation.
- Complete functional test with every activation.
- Alternative single pole changeover & double pole versions are also available (Series 02, Series 11).

Accessories

- KEY/STI Reset Key

Dimensions

- Height – 90mm
- Width – 89mm
- Depth – 72mm

Waterproof Reset Call Point

STI Waterproof ReSet Call Points

Dimensions and Technical Information



BUILD YOUR OWN MODEL

Prefix Options:
WRP2 - Waterproof ReSet Call Point

Colour Options:
R = Red
G = Green
Y = Yellow
B = Blue
W = White
O = Orange

Electrical Arrangement Options:
01 = Conventional Fire Model (470 680Ω)
02 = Single Pole Changeover
11 = Double Pole Changeover

Label Options:
CL = Custom Label

Standard Function Marking - will come as standard with all models (except red & green) unless -CL is specified. See right for standard labels supplied.

WRP2 - - -

Colour Options



Label Options



Supplied with all red models as standard, unless -CL is specified



Supplied with all green models as standard, unless -CL is specified

STANDARD FUNCTION MARKING

Supplied with all models (except red & green) unless -CL is specified

CUSTOM LABEL

Add -CL to desired product code (available for all colours)

Standard Function Marking:


Contains the following labels, with black or white text, depending on colour selected:

- EMERGENCY • EMERGENCY DOOR RELEASE • EMERGENCY EXIT
- EVACUATE • GAS ABORT • GAS RELEASE • GAS SHUT OFF • INCIDENT
- ISOLATION SWITCH • PANIC ALARM • POOL ALARM • SMOKE VENT

CUSTOM LABEL = Max, 2 lines, 10 characters per line including spaces

Electrical Arrangement Options

*Switch arrangements shown with ReSet in standby

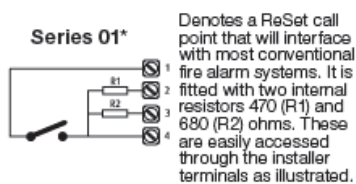

*only available with Red models

